

# SLD30N15T/SLP30N15T 150V N -Channel MOSFET

SLD30N15T/SLP30N15T

## General Description

This Power MOSFET is produced using Maple semi's advanced planar stripe TRENCH technology.


This advanced technology has been especially tailored to minimize conduction loss, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode.

## Application

- Motor Drives
- DC/DC conversion
- Power Management

## Features

- N-Channel: 150V 30A
- $R_{DS(on)Typ} = 37.0\text{m}\Omega @ V_{GS} = 10\text{ V}$
- Very Low On-resistance RDS(ON)
- Low Crss
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability

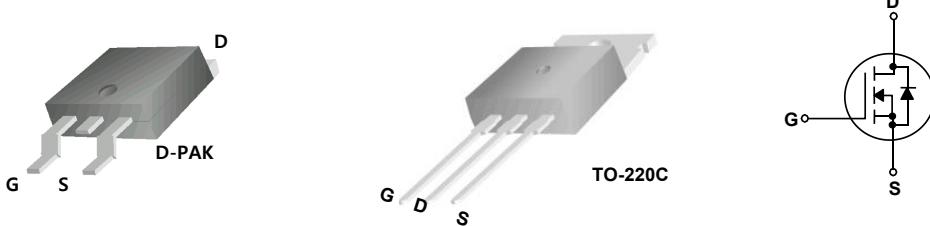

## Absolute Maximum Ratings

$T_C = 25^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	SLD30N15T/SLP30N15T	Units
$V_{DSS}$	Drain-Source Voltage	150	V
$I_D$	Drain Current - Continuous ( $T_C = 25^\circ\text{C}$ ) - Continuous ( $T_C = 100^\circ\text{C}$ )	30 18	A
$I_{DM}$	Drain Current - Pulsed (Note 1)	120	A
$V_{GSS}$	Gate-Source Voltage	$\pm 20$	V
$E_{AS}$	Single Pulsed Avalanche Energy	50	mJ
$P_D$	Power Dissipation ( $T_C = 25^\circ\text{C}$ ) Power Dissipation ( $T_C = 100^\circ\text{C}$ )	70 28	W
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.8	$^\circ\text{C}/\text{W}$
$R_{\theta JA}$	Thermal Resistance, Junction to ambient	50	$^\circ\text{C}/\text{W}$
$T_J, T_{STG}$	Operating and Storage Temperature Range	-55 to +150	$^\circ\text{C}$
$T_L$	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	300	$^\circ\text{C}$

\* Drain current limited by maximum junction temperature.

## Electrical Characteristics

$T_C = 25^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
--------	-----------	-----------------	-----	-----	-----	-------

### Off Characteristics

$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}} = 0 \text{ V}, I_D = 250 \mu\text{A}$	150	--	--	V
$I_{\text{DSS}}$	Zero Gate Voltage Drain Current	$V_{\text{DS}} = 150 \text{ V}, V_{\text{GS}} = 0 \text{ V}$	--	--	1	$\mu\text{A}$
$I_{\text{GSSF}}$	Gate-Body Leakage Current, Forward	$V_{\text{GS}} = 20 \text{ V}, V_{\text{DS}} = 0 \text{ V}$	--	--	100	nA
$I_{\text{GSSR}}$	Gate-Body Leakage Current, Reverse	$V_{\text{GS}} = -20 \text{ V}, V_{\text{DS}} = 0 \text{ V}$	--	--	-100	nA

### On Characteristics

$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250 \mu\text{A}$	1.2	2.2	3.2	V
$R_{\text{DS(on)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}} = 10 \text{ V}, I_D = 20 \text{ A}$	--	37.0	46.0	$\text{m}\Omega$
$g_{\text{fs}}$	Transconductance	$V_{\text{DS}} = 5 \text{ V}, I_D = 20 \text{ A}$	-	30	-	S

### Dynamic Characteristics

$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}} = 40 \text{ V}, V_{\text{GS}} = 0 \text{ V}, f = 1.0 \text{ MHz}$	--	1270	-	pF
$C_{\text{oss}}$	Output Capacitance		--	385	-	pF
$C_{\text{rss}}$	Reverse Transfer Capacitance		--	30	-	pF

### Switching Characteristics

$t_{\text{d(on)}}$	Turn-On Delay Time	$V_{\text{GS}} = 10 \text{ V}, V_{\text{DS}} = 75 \text{ V}, R_L = 3 \Omega, I_D = 20 \text{ A}, T_J = 25^\circ\text{C}$	--	15	--	ns
$t_r$	Turn-On Rise Time		--	10	--	ns
$t_{\text{d(off)}}$	Turn-Off Delay Time		--	20	--	ns
$t_f$	Turn-Off Fall Time		--	5	--	ns
$Q_g$	Total Gate Charge	$V_{\text{DS}} = 75 \text{ V}, I_D = 20 \text{ A}, V_{\text{GS}} = 10 \text{ V}$	--	19.6	--	nC
$Q_{\text{gs}}$	Gate-Source Charge		--	5.2	--	nC
$Q_{\text{gd}}$	Gate-Drain Charge		--	5.2	--	nC

### Drain-Source Diode Characteristics and Maximum Ratings

$I_S$	Maximum Continuous Drain-Source Diode Forward Current	--	--	30	A
$I_{\text{SM}}$	Maximum Pulsed Drain-Source Diode Forward Current	--	--	120	A
$V_{\text{SD}}$	Drain to Source Diode Forward Voltage, $V_{\text{GS}} = 0 \text{ V}, I_{\text{SD}} = 20 \text{ A}, T_J = 25^\circ\text{C}$	--	0.80	1.3	V
$T_{\text{rr}}$	Reverse recovery time, $I_F = 20 \text{ A}, DIF/dt = 100 \text{ A}/\mu\text{s}$		73		ns
$Q_{\text{rr}}$	Reverse recovery charge, $I_F = 20 \text{ A}, DIF/dt = 100 \text{ A}/\mu\text{s}$		245		nC

#### Notes:

1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature
2. EAS condition:  $T_J = 25^\circ\text{C}, V_{\text{DD}} = 50 \text{ V}, V_{\text{G}} = 10 \text{ V}, L = 1.0 \text{ mH}, I_{\text{AS}} = 10 \text{ A}$
3. Pulse Test: Pulse Width  $\leq 300 \mu\text{s}$ , Duty Cycle  $\leq 0.5\%$

## N-Channel Typical Characteristics

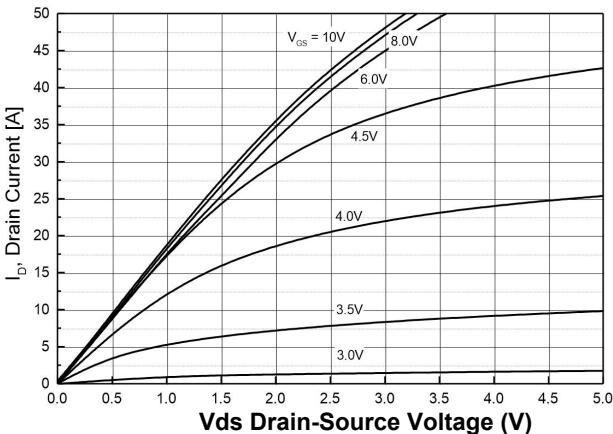


Figure 1. On-Region Characteristics

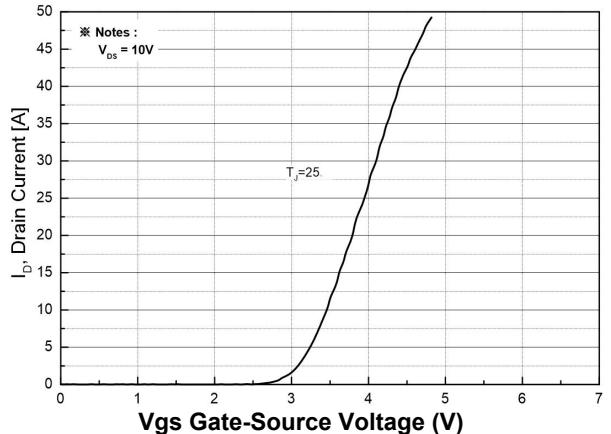


Figure 2. Transfer Characteristics

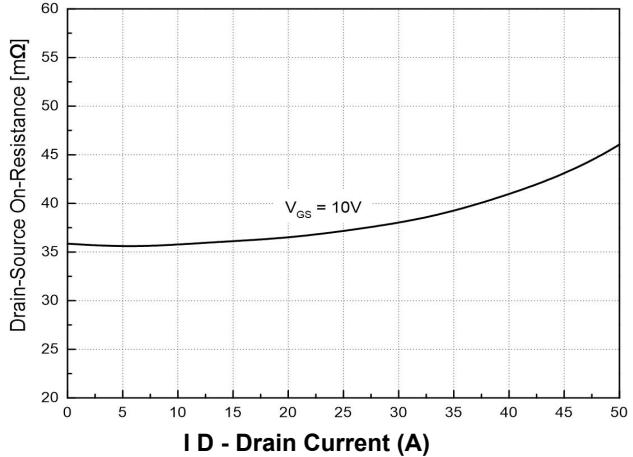


Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage

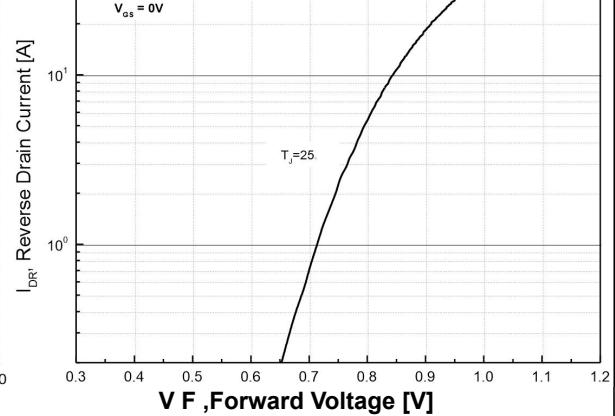


Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature

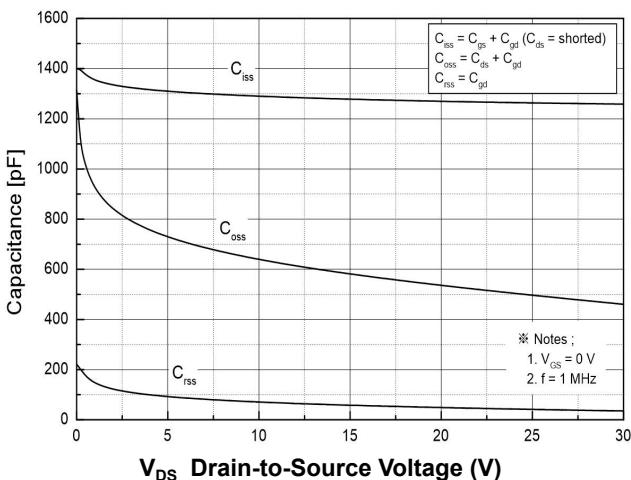


Figure 5. Capacitance Characteristics



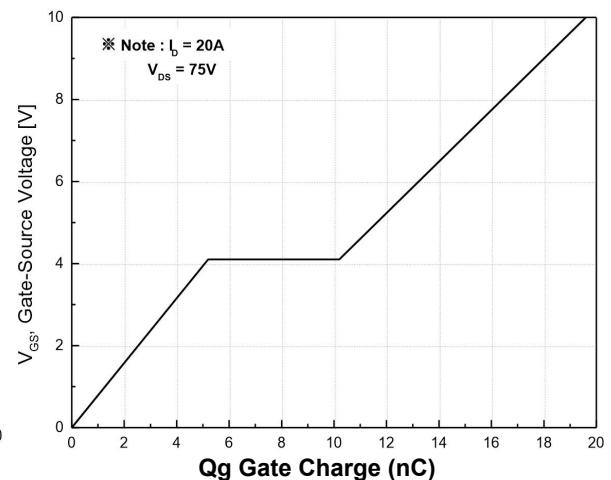


Figure 6. Gate Charge Characteristics


## N-Channel Typical Characteristics (Continued)

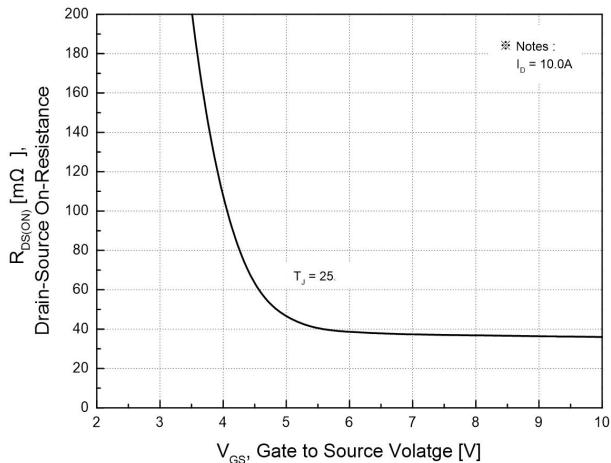


**Figure 7. On-Resistance Variation with Gate to Source Voltage**

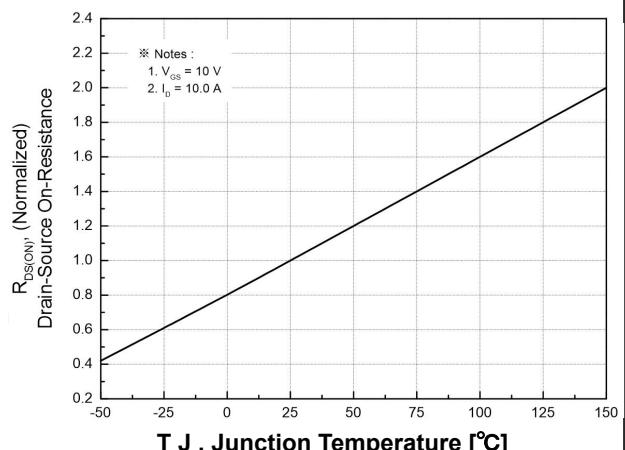


**Figure 8. On-Resistance Variation vs Temperature**

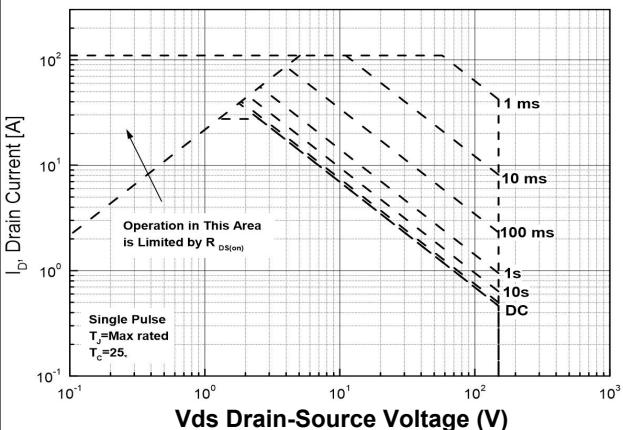

**Figure 9. Maximum Safe Operating Area**

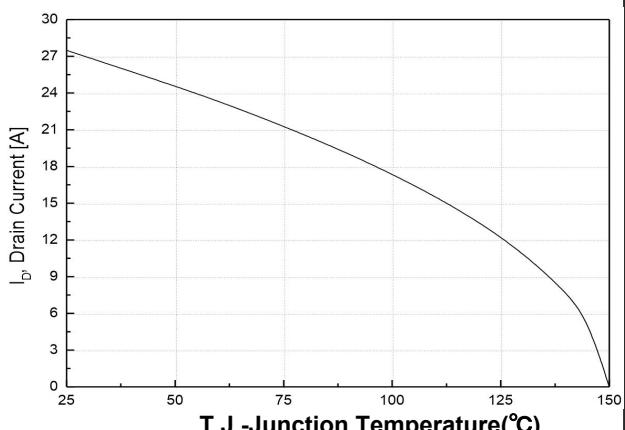


**Figure 10. Maximum Continuous Drain Current vs Case Temperature**

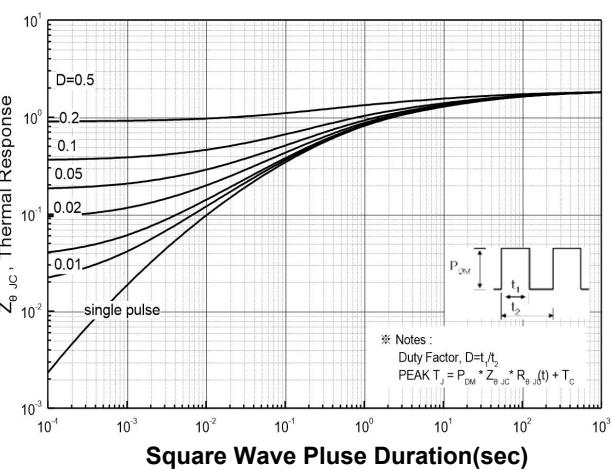


**Figure 11. Transient Thermal Response Curve**


## Gate Charge Test Circuit & Waveform

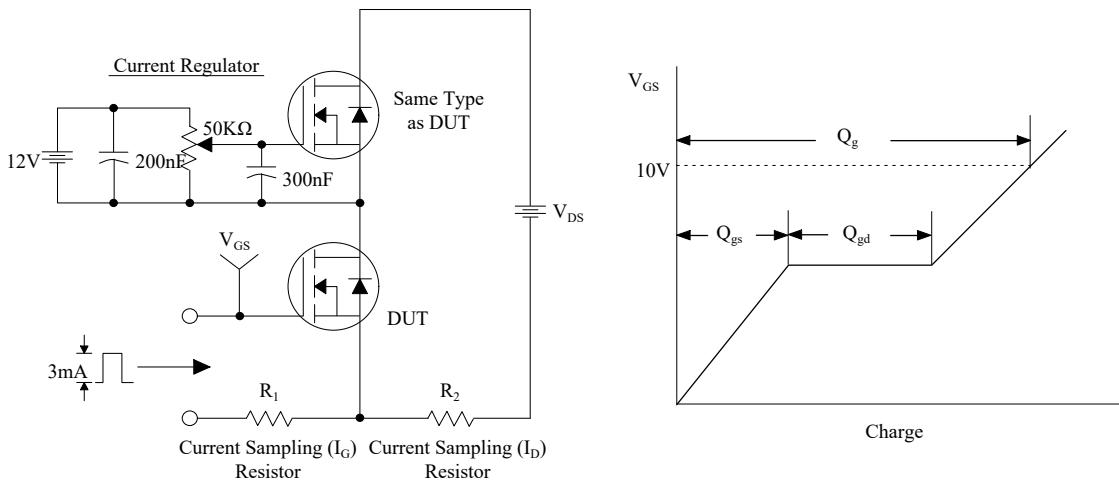

## Resistive Switching Test Circuit & Waveforms

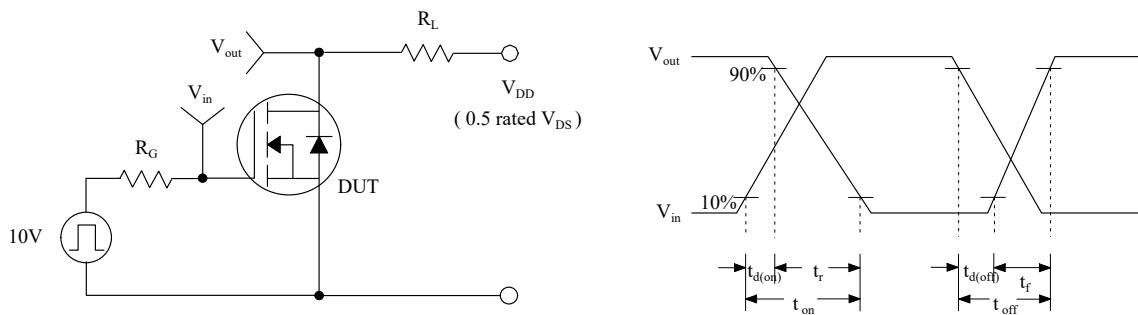

## Unclamped Inductive Switching Test Circuit & Waveforms

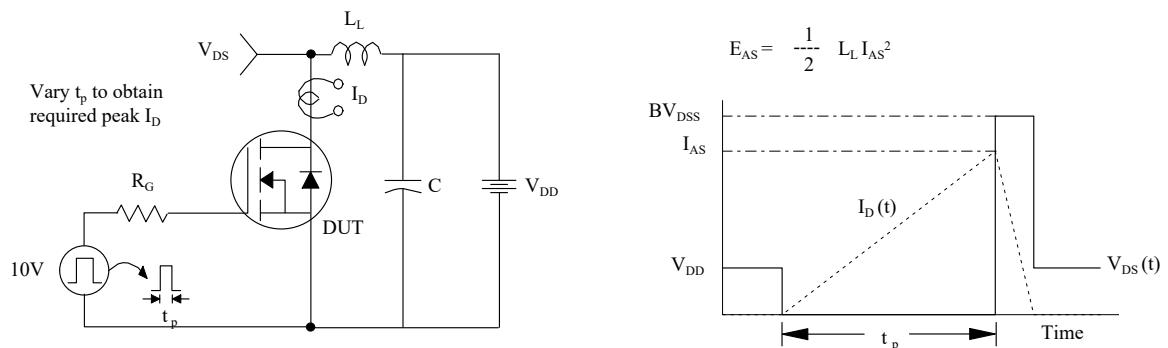

## Peak Diode Recovery dv/dt Test Circuit & Waveforms

